

Applications

Construction

Main features

All pump components are guarded and easily accessible for adjustment and service.

Control panel swivels for convenient operation from either side of pump.

Protective guard panel strains larger objects from concrete mix.

Attach-plates on both sides of pump make it easy to position in tight spots for either left- or right-hand delivery.

Protects underground utilities from large concrete trucks.

Keeps concrete trucks off driveways and sidewalks; prevents ruts in soft ground.

Hose can be routed through small openings, under decks, through bushes, across rivers, around trees and buildings, over moguls.


Compatibility

Description	Item number	Compatible with loader
Concrete Pump	7108693	T190-E, T320-B, S630-E, S185-E, T190-B, S250-B, T870-E, S850-E, S650-E, T650-E, S205-E, S770-E, T770-E, A770-E

Characteristics and performance

Description	Item number	Hopper capacity (m3)	Vertical pumping height	Horizontal pumping distance	Pumping rate (m3/h)	Flow range [MIN]
Concrete Pump	7108693	0.28	0.0-15.0	0.0-75.0	13.0-23.0	56.0-151.0

Weights and dimensions

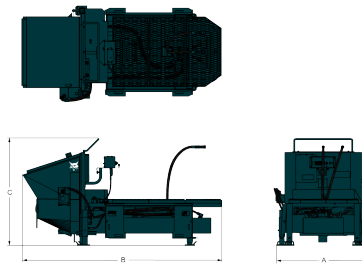

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Concrete Pump	7108693	454.0	454.0	1216.0	2615.0	1406.0