

Applications

 Municipal jobs
 Forestry
 Parks
 Landscaping

 Golf courses
 Nurseries
 Hobby farmers

Main features

 Three partially overlapping blades for clean cutting with no skips.
 Direct hydraulic motor drive.
 Industry standard cutting blades elevate grass for better mulching capability.
 Adjustable cutting height from 57 to 140 mm in 13 mm increments.

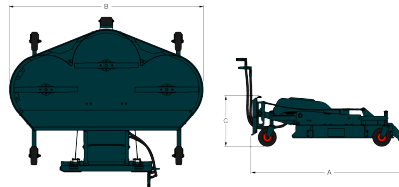
 Unique attachment frame allows mower to oscillate independently of loader.
 Rear discharge disperses grass clippings under the carrier, away from buildings, trees and fences.
 Patented blade shutoff device stops blade rotation when mower is raised off the ground.
 Anti-scalping wheel allows operator to traverse uneven terrain without scalping the surface.

Compatibility

Description	Item number	Compatible with loader Compatible with telescopic
Mower 72in	7144850	S150-E, S160-E, T190-E, T110-E, T320-B, S630-E, S185-E, S175-E, T190-B, S250-B, S100, S130-E, S650-E, T650-E, S205-E, S510-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E, T2250
Mower 90in	7143993	S150-E, S160-E, T190-E, T320-B, S630-E, S185-E, S175-E, T190-B, S250-B, T870-E, S850-E, S650-E, T650-E, S205-E, S510-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E, T2250

Characteristics and performance

Description	Item number	Flow range (L/min)	Number of blades	Shutoff travel height (mm)	Cutting height range (mm)	Tip speed
Mower 72in	7144850	57.0-83.0	3	86.0	51.0-140.0	61 m/s @ 57 l/min, 89 m/s @ 83 l/min
Mower 90in	7143993	57.0-83.0	3	86.0	51.0-140.0	59 m/s @ 57 l/min, 87 m/s @ 83 l/min

Weights and dimensions


Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Mower 72in	7144850	400.0	400.0	1727.0	1930.0	559.0
Mower 90in	7143993	450.0	450.0	1905.0	2388.0	559.0