

### Applications

Construction  
Trenching

Communications (telephone, fiber optic cables)  
Utilities (water, gas, electricities)

### Main features

A hydraulically controlled trench cleaner, for cleaner trenches every time (not for WS18 with 80 mm wheel and not for WS32).  
More precise cutting action than air or hydraulic hammers can provide.  
Easier to transport than dedicated machines.

Hydraulic side shift.  
Powerfull cutting in asphalt, concrete and rock. Cuts clean, precise, without damaging the edges of the trench.


### Compatibility

Description	Item number	Compatible with loader
Wheel Saw WS18 80mm	6729537*WSA	S175-E, S185-E, S630-E, S650-E, T190-E, T650-E, S205-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E
Wheel Saw WS18 130mm	6729537*WSB	S175-E, S185-E, S630-E, S650-E, T190-E, T650-E, S205-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E
Wheel Saw WS18 160mm	6729537*WSC	S175-E, S185-E, S630-E, S650-E, T190-E, T650-E, S205-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E
Wheel Saw WS18 180mm	6729537*WSD	S175-E, S185-E, S630-E, S650-E, T190-E, T650-E, S205-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E
Wheel Saw WS18 200mm	6729537*WSE	S175-E, S185-E, S630-E, S650-E, T190-E, T650-E, S205-E, S530-E, S550-E, S550-B, S570-E, S590-E, T590-E
Wheel Saw WS24 130mm	6729566*WSB	S630-E, S650-E, T650-E
Wheel Saw WS24 160mm	6729566*WSC	S630-E, S650-E, T650-E
Wheel Saw WS24 180mm	6729566*WSD	S630-E, S650-E, T650-E
Wheel Saw WS24 200mm	6729566*WSE	S630-E, S650-E, T650-E
Wheel Saw WS32 250mm	7197218	S850-E

### Characteristics and performance

Description	Item number	Working width (mm)	Working Depth (mm)	Trench cleaner	N° of bits	Wheel rotation @ 113 lpm (RPM)
Wheel Saw WS18 80mm	6729537*WSA	80.0	150.0-450.0	no	64	80.0
Wheel Saw WS18 130mm	6729537*WSB	130.0	150.0-450.0	yes	56	80.0
Wheel Saw WS18 160mm	6729537*WSC	160.0	150.0-450.0	yes	56	80.0
Wheel Saw WS18 180mm	6729537*WSD	180.0	150.0-450.0	yes	62	80.0
Wheel Saw WS18 200mm	6729537*WSE	200.0	150.0-450.0	yes	62	80.0
Wheel Saw WS24 130mm	6729566*WSB	130.0	200.0-600.0	yes	80	67.0
Wheel Saw WS24 160mm	6729566*WSC	160.0	200.0-600.0	yes	96	67.0
Wheel Saw WS24 180mm	6729566*WSD	180.0	200.0-600.0	yes	96	67.0
Wheel Saw WS24 200mm	6729566*WSE	200.0	200.0-600.0	yes	96	67.0
Wheel Saw WS32 250mm	7197218	250.0	450.0-800.0	no	72	67.0

### Weights and dimensions

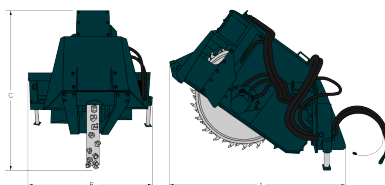

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Wheel Saw WS18 80mm	6729537*WSA	1004.0	1004.0	1753.0	1740.0	1626.0
Wheel Saw WS18 130mm	6729537*WSB	917.0	917.0	1753.0	1740.0	1626.0
Wheel Saw WS18 160mm	6729537*WSC	932.0	932.0	1753.0	1740.0	1626.0
Wheel Saw WS18 180mm	6729537*WSD	942.0	942.0	1753.0	1740.0	1626.0
Wheel Saw WS18 200mm	6729537*WSE	961.0	961.0	1753.0	1740.0	1626.0
Wheel Saw WS24 130mm	6729566*WSB	1126.0	1126.0	1880.0	1740.0	2057.0
Wheel Saw WS24 160mm	6729566*WSC	1169.0	1169.0	1880.0	1740.0	2057.0
Wheel Saw WS24 180mm	6729566*WSD	1183.0	1183.0	1880.0	1740.0	2057.0
Wheel Saw WS24 200mm	6729566*WSE	1192.0	1192.0	1880.0	1740.0	2057.0
Wheel Saw WS32 250mm	7197218	1440.0	1440.0	2386.0	1650.0	1802.0